



AGRICULTURAL TRACKS AND WHEELS LINEUP FOR AGCO




We are dedicated to supporting farmers in every step of their operations. For customer service, contact us toll free at 1 844 CAMSOAG, or 1 317 671-7327, or by email at Ag.ProductSupport@camso.co

**CONNECT WITH US FOR EXCLUSIVE
ROAD FREE CONTENT**



camso.co

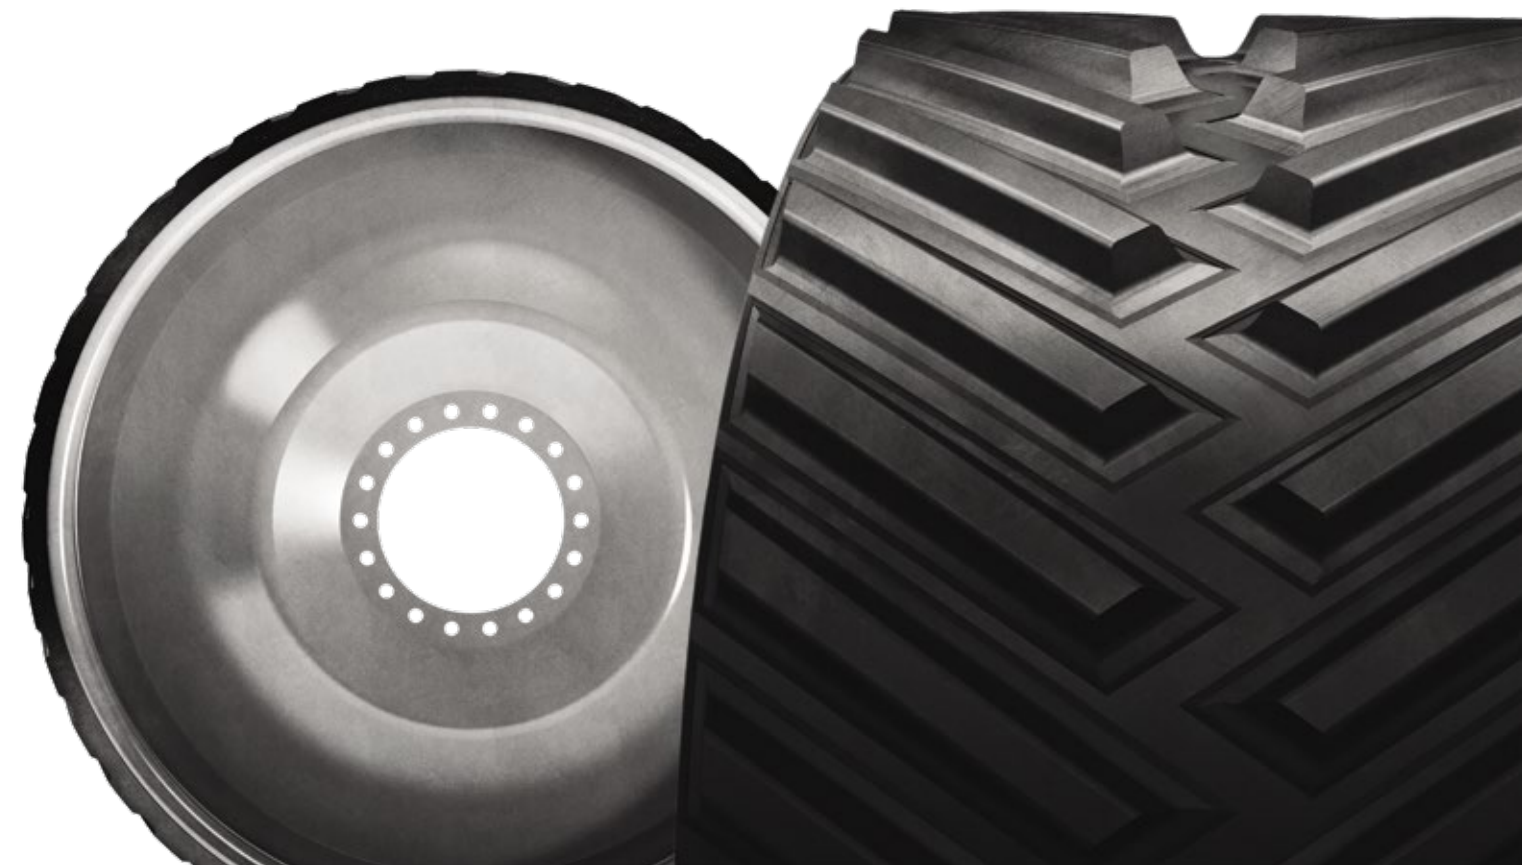



DRIVING FARMING FORWARD

CAMSO AND AGCO

Every day, we ask ourselves: “Is there a better way to drive farming forward?” We believe there is – by providing mobility solutions to help you get the job done.

At Camso, we do it by developing and manufacturing the broadest range of tracks for all farming applications. Camso tracks increase mobility and flotation, and reduce soil compaction.

From field preparation to planting, harvesting and transport, Camso tracks help maximize your work while lowering your operating costs.

**OUR TRACKS ARE THE APPROVED CHOICE
OF MANUFACTURERS, ENDORSED BY DEALERS
AND RECOGNIZED BY FARMERS.**

COMPLETE LINEUP

AGCO TRACTORS

Camso offers the broadest range of tracks and replacement wheels for your AGCO tractor.

CHALLENGER MT700 AND MT800 SERIES



CAMSO AG
6500



CAMSO AG
4500



CAMSO AG
2500

CAMSO REPLACEMENT WHEELS



MIDROLLER



IDLER



DRIVER


CHALLENGER MT700 AND MT800 SERIES

DESIGNED TO AGCO'S
SPECIFICATIONS, CAMSO TRACKS
PROVIDE THE BEST BALANCE
OF TREAD BAR LIFE AND CARCASS
DURABILITY TO MAXIMIZE
THE PERFORMANCE AND
EFFICIENCY OF YOUR TRACTOR.




SELECT THE RIGHT TRACK FOR YOUR APPLICATION AND FARMING CONDITIONS

MT700 AND MT800 SERIES

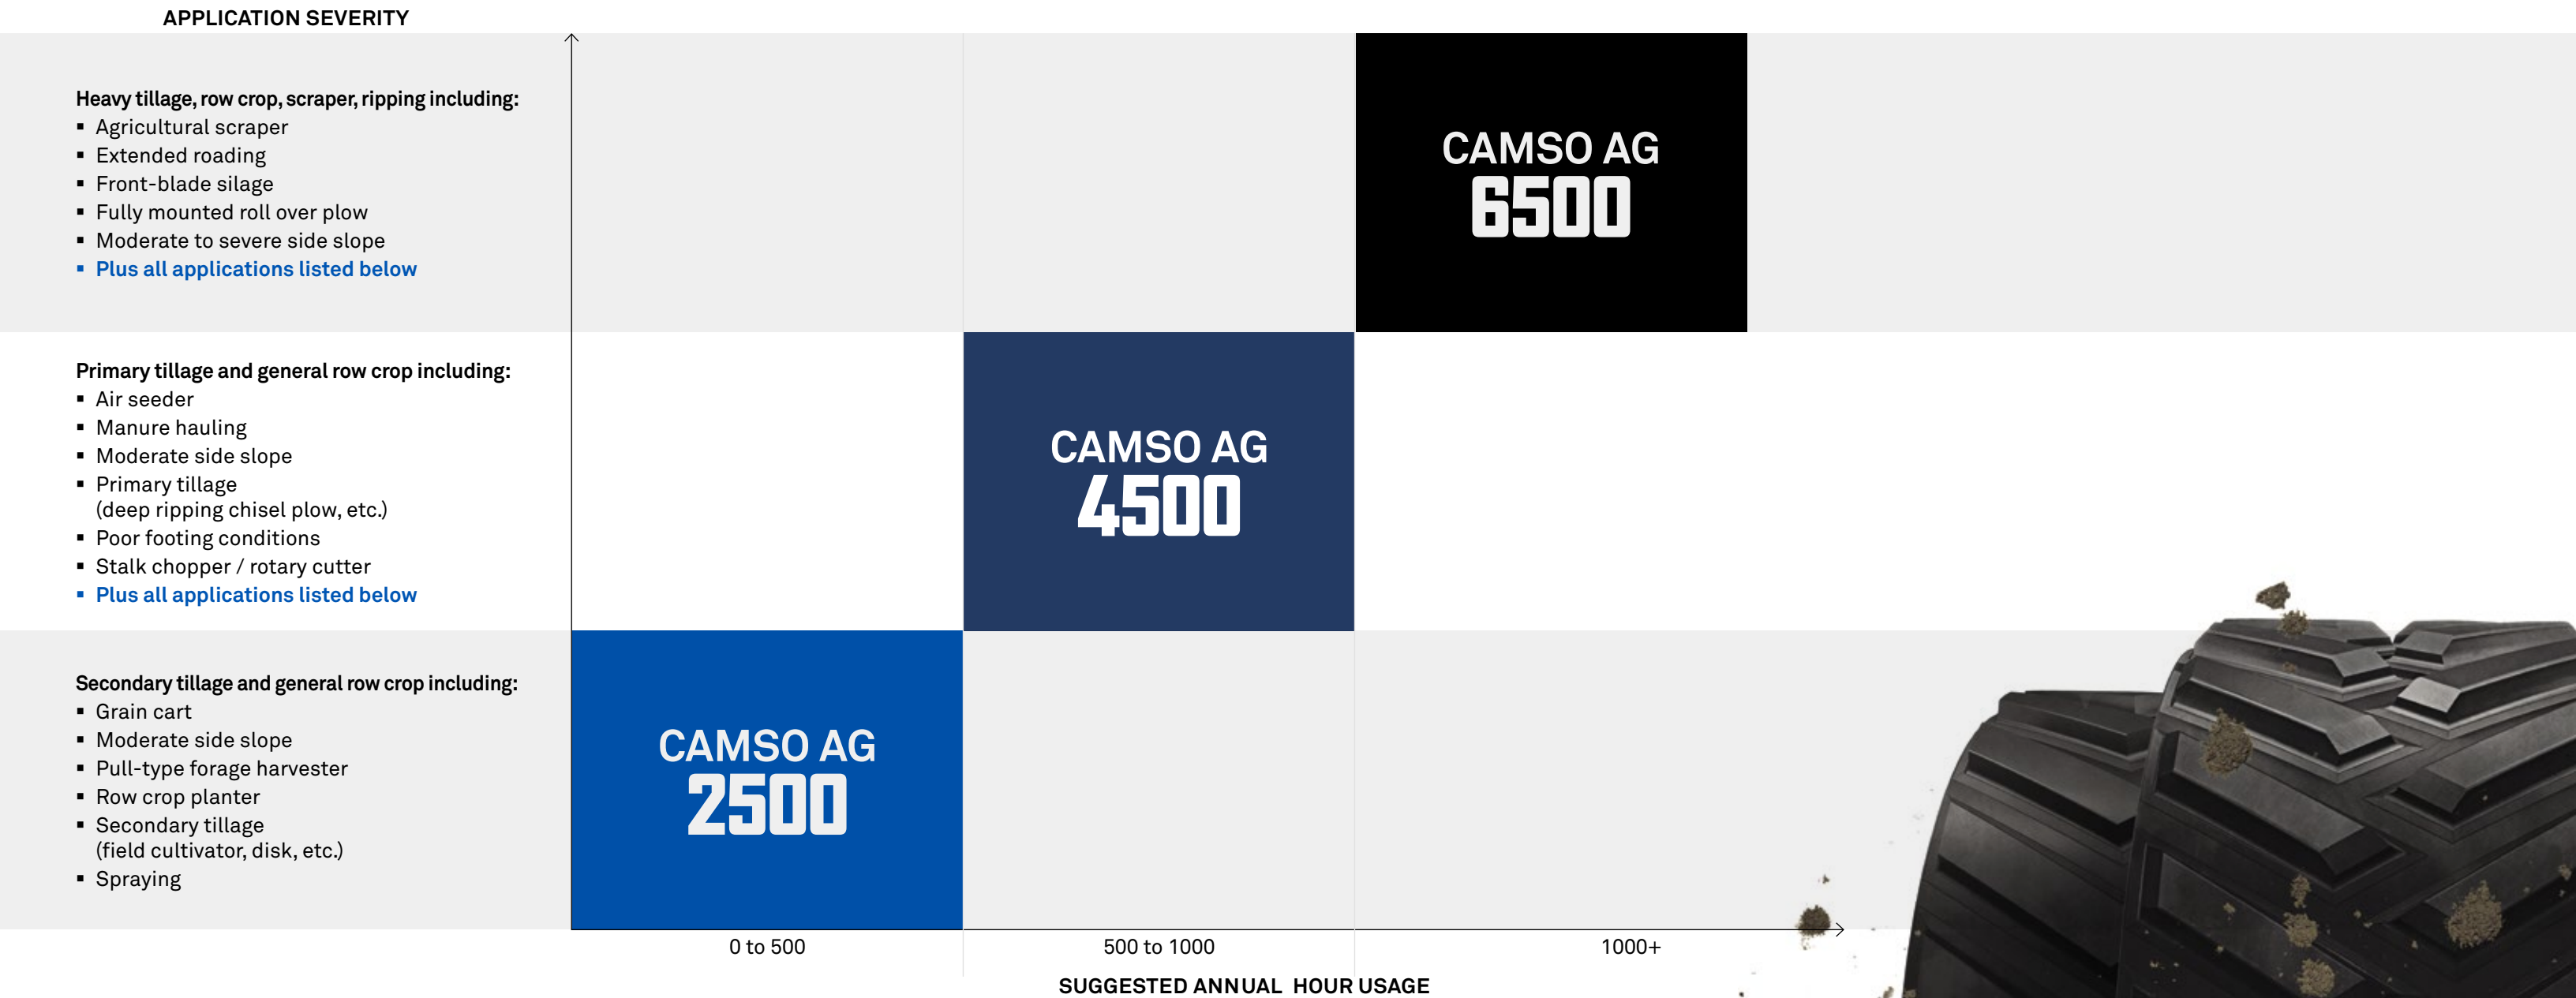

FEATURES AND BENEFITS

FOR CHALLENGER MT700 AND MT800 SERIES



High-grade rubber compounds

Maximizes performance and durability




Long lasting tread bar

Wear-resistant tread compound combined with a design geared towards your application



Strengthened guide lugs

Enhanced guide lug geometry reduces risk of torn guide lugs



Longest lasting carcass


Most durable, consistent and predictable performance due to Camso's unique manufacturing and curing process



High tensile strength main cables

Designed to resist high tension and tractive effort, typical to friction drive

6500 – 16.5 in. and 18 in. row crop and 30 in. scraper come standard with an industry-leading 6.7 mm main cable to minimize carcass tear

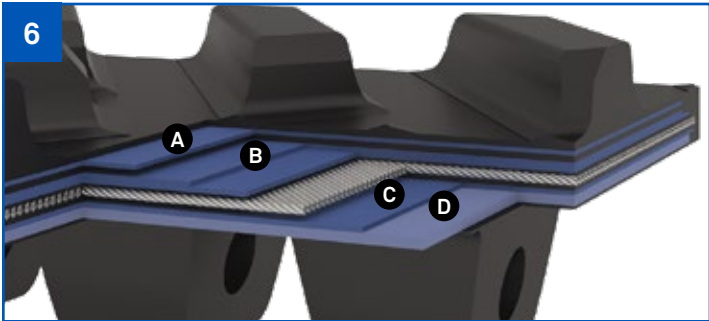
















Impact-resistant carcass

- A** Steel reinforcement ply for added rigidity and stubble damage resistance
- B 6500 only:** Fatigue-resistant reinforcement for extended track life and increased load-bearing capacity
- C** High-impact steel reinforcement to reduce the risk of carcass tear and separation
- D 6500 only:** puncture-resistant rubber layer to reduce the risk of carcass tear and separation in very demanding applications

THE RIGHT TRACK FOR YOUR APPLICATION

FOR CHALLENGER
MT700 AND MT800 SERIES



TRACK SERIES	APPLICATIONS	SUGGESTED ANNUAL HOUR USAGE	FEATURES	PERFORMANCE
CAMSD AG 6500 Unmatched performance, durability and reliability	Scraper, ripper, heavy tillage and row crop	1000+	<div><div><div>1</div><div>High-grade rubber compounds</div></div><div><div>2</div><div>Long lasting tread bar</div></div><div><div>3</div><div>Strengthened guide lugs</div></div><div><div>4</div><div>Longest lasting carcass</div></div><div><div>5</div><div>High tensile strength main cables</div></div><div><div>6</div><div>Impact-resistant carcass</div></div></div>	<div>TREAD LIFE<div></div></div> <div>CARCASS DURABILITY<div></div></div> <div>SIDE LOAD RESISTANCE<div></div></div>
CAMSD AG 4500 High performance, value-driven	General tillage and row crop	500 to 1000	<div><div><div>1</div><div>High-grade rubber compounds</div></div><div><div>2</div><div>Long lasting tread bar</div></div><div><div>3</div><div>Strengthened guide lugs</div></div><div><div>4</div><div>Longest lasting carcass</div></div><div><div>6</div><div>Impact-resistant carcass</div></div></div>	<div>TREAD LIFE<div></div></div> <div>CARCASS DURABILITY<div></div></div> <div>SIDE LOAD RESISTANCE<div></div></div>
CAMSD AG 2500 Competitive performance, for less	Secondary tillage and general row crop	100 to 500	<div><div><div>1</div><div>High-grade rubber compounds</div></div><div><div>2</div><div>Long lasting tread bar</div></div><div><div>3</div><div>Strengthened guide lugs</div></div><div><div>4</div><div>Longest lasting carcass</div></div></div>	<div>TREAD LIFE<div></div></div> <div>CARCASS DURABILITY<div></div></div> <div>SIDE LOAD RESISTANCE<div></div></div>

REMANUFACTURING PROGRAM

DON'T FORGET: YOUR CORE HAS A VALUE

Your worn tracks and wheels can now be remanufactured, helping you to save up to 40% on MSRP.

Our Certified Remanufacturing Program provides you with an economical, effective and durable solution for general agriculture applications that will extend the use of your tracks and wheels.

Contact your Camso authorized dealer or visit camso.co to learn more about our program.



GIVE MULTIPLE LIVES TO A PRODUCT YOU'VE ALWAYS TRUSTED.

CAMSO'S CERTIFIED REMANUFACTURING PROGRAM
IS AVAILABLE FOR FRICTION DRIVE TRACKS

TECHNICAL SPECIFICATIONS

CHALLENGER MT700 AND MT800 SERIES

CAMSO Track series	AGCO Tractor model	Track width (in.)	Part number	Tread				Guide lugs		Carcass		
				Qty	Height (in.)	Tip width (in.)	Pitch (in.)	Qty	Length (in.)	Bias ply	Main cable size (mm)	Thickness (mm)
6500	MT700	14.5	E14AR02909 (LH)	46	3	2.5	7.8	46	5.5	4	6.7	44
		14.5	E14AR02908 (RH)	46	3	2.5	7.8	46	5.5	4	6.7	44
		16.5	E16AR02920 (LH)	46	3	2.5	7.8	46	5.5	4	6.7	44
		16.5	E16AR02919 (RH)	46	3	2.5	7.8	46	5.5	4	6.7	44
		18	E18AR02923	92	3	2.5	7.8	46	5.5	4	6.7	44
		18	E18AR02925 High Roding (LH)	46	3	2.5	7.8	46	5.5	4	6.7	44
		18	E18AR02924 High roding (RH)	46	3	2.5	7.8	46	5.5	4	6.7	44
		25	E25AR02990 High roding	92	3	2.5	7.8	46	5.5	4	5.4	42
		25	E25AR02989	92	2.7	1.6	7.8	46	5.5	4	5.4	42
		30	E30AR02994 High roding	92	2.7	1.6	7.8	46	5.5	4	5.4	41
	MT800	30	E30AR02993	46	2.7	1.6	7.8	46	4.7	4	5.4	42
		34	E34AR03102	92	58	41	195	46	119	3	5.4	31
		18	E18AS02930	100	3	2.5	8	52	5.5	4	6.7	44
		25.5	E25AS03180	100	2.7	1.6	8	52	5.5	4	5.4	42
		27.5	E27AS02997 High roding	100	3	2.5	8	52	5.5	4	5.4	42
		27.5	E27AS02996	100	2.7	1.6	8	52	5.5	4	5.4	42
		30	E30AS03000 High roding	100	3	2.5	8	52	5.5	4	5.4	42
		30	E30AS02999	100	2.7	1.6	8	52	5.5	4	5.4	42
		30	E30AS02932 Scraper	100	2.2	2.8	8	52	5.5	4	6.7	44
		36	E36AS03002 High roding	100	3	2.5	8	52	5.5	4	5.4	42
4500	MT700	36	E36AS02934 Scraper	100	2.2	2.8	8	52	5.5	4	6.7	44
		16.5	F16AR02922 (LH)	46	2.7	1.6	7.8	46	4.7	4	5.4	37
		16.5	F16AR02921 (RH)	46	2.7	1.6	7.8	46	4.7	4	5.4	37
		18	F18AR02926	92	2.7	1.6	7.8	46	4.7	4	5.4	37
		18	F18AR02927 Low Ground Disturbance	130	1.5	2.8	5.5	46	4.7	4	5.4	37
		24	F24AR02868	92	2.7	1.6	7.8	46	4.7	4	5.4	37
		25	F25AR02992 Low Ground Disturbance	130	1.6	2.76	5.5	46	4.7	4	5.4	37
		25	F25AR02991	92	2.7	1.6	7.8	46	4.7	4	5.4	37
		25	F25AR02928	92	2.7	1.6	7.8	46	5.5	4	5.4	37
		30	F30AR02995	92	2.7	1.6	7.8	46	4.7	4	5.4	37
	MT800	30	F30AR02929	92	2.7	1.6	7.8	46	5.5	4	5.4	37
		34	F34AR03101	46	2.7	1.6	7.8	46	4.7	4	5.4	37
		25.5	F25AS03179	100	2.7	1.6	8	52	4.7	4	5.4	37
		27.5	F27AS02998	100	2.7	1.6	8	52	4.7	4	5.4	37
		27.5	F27AS02931	100	2.7	1.6	8	52	5.5	4	5.4	37
		30	F30AS03001	100	2.7	1.6	8	52	4.7	4	5.4	37
		30	F30AS02933	100	2.7	1.6	8	52	5.5	4	5.4	37
		36	F36AS03003	100	2.7	1.6	8	52	4.7	4	5.4	37
		16	A16AR03293	92	2.3	1.6	7.8	46	4.7	3	5.4	31
		18	A18AR03294	92	2.3	1.6	7.8	46	4.7	3	5.4	31
2 500	MT700	25	A25AR03295	92	2.3	1.6	7.8	46	4.7	3	5.4	31
		30	A30AR03306	92	2.3	1.6	7.8	46	4.7	3	5.4	31
	MT800	27.5	A27AS03296	100	2.3	1.6	8	52	4.7	3	5.4	31
		30	A30AS03297	100	2.3	1.6	8	52	4.7	3	5.4	31

DRIVEN BY QUALITY

PERFORMANCE AND DURABILITY FROM THE INSIDE OUT

Camso longest lasting carcass

No material displacement during the manufacturing and curing process means:

- Rubber compounds located exactly where you need them
- Uniform tension distribution, minimizing downtime due to carcass tear
- A product with increased durability and performance

CAMSO'S UNIQUE SINGLE CURE PROCESS



X-RAY

COMPETITOR MOLDING PROCESS



X-RAY

DURABLE, CONSISTENT AND PREDICTABLE PERFORMANCE

Warranty: Camso is the industry standard for warranty coverage on Agricultural tracks. Tracks are warrantied against defects in materials and workmanship, and prorated based on both time and usage, so customers receive fair value on warranty replacement tracks. Some conditions apply. Refer to the warranty certificate for details. For more info, visit camso.co/agriculture

REPLACEMENT DRIVER, IDLER AND MIDROLLER WHEELS

We offer the broadest range of rubber and polyurethane (PU) wheels for all AGCO tractors.


Engineered based on manufacturer’s specifications

Driver and idler wheels available in rubber only

Midroller wheels available in PU and rubber

CAMSO POLYURETHANE MIDROLLERS

Heat resistance

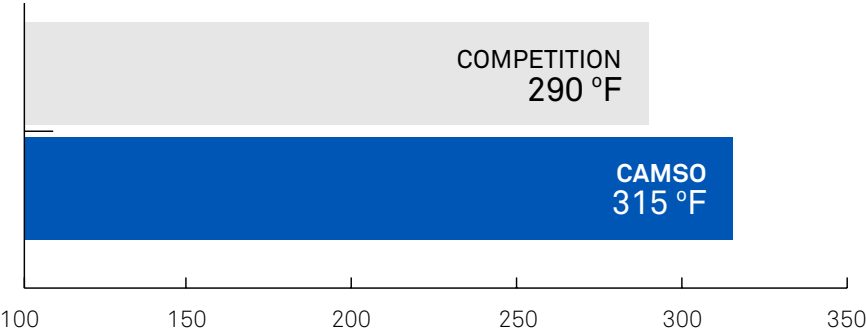

- Designed for today’s high-temperature operations, especially during transport
- 25% improvement in chunking resistance vs. rubber

12-month material and workmanship defect warranty

CAMSO PU MIDROLLERS ARE SPECIFICALLY ENGINEERED TO IMPROVE HEAT TOLERANCE FOR EXTENDED WHEEL LIFE.

WHEEL TECHNICAL SPECIFICATIONS

PRODUCT FAMILY	CAMSO PART NUMBER	OEM PART NUMBER	COATING TYPE	MODEL/TRACK WIDTH COMPATIBILITY
MT700				
Midroller	4W-0011PA	502930D1	Rubber	Does not fit on MT738,740,743
Idler	5W-0051PA	504781D1	Rubber	All
MT700/800				
Midroller	4W-0024PA	502931D1	Rubber	Does not fit on MT738,740,743
Midroller	4W-0020PA	502932D1	Rubber	Does not fit on MT738,740,743
Midroller	4W-5007PA	548349D3	Polyurethane	Does not fit on MT738,740,743
Midroller	4W-5009PA	548350D3	Polyurethane	Does not fit on MT738,740,743
Idler	5W-0047PA	504783D1	Rubber	All
Idler	5W-0032PA	504782D1	Rubber	All
Idler	5W-0330PA	504784D2	Rubber	All
Driver (RH)	3W-0064PA	504787D1	Rubber	All
Driver (RH)	3W-0071PA	504789D1	Rubber	All
Driver (LH)	3W-0067PA	504788D1	Rubber	All
Driver (LH)	3W-0074PA	504790D1	Rubber	All

