



# AGRICULTURAL TRACKS AND WHEELS LINEUP FOR CATERPILLAR




We are dedicated to supporting farmers in every step of their operations.  
For customer service, contact us toll free at 1 844 CAMSOAG, or 1 317 671-7327,  
or by email at [Ag.ProductSupport@camso.co](mailto:Ag.ProductSupport@camso.co)

**CONNECT WITH US FOR EXCLUSIVE  
ROAD FREE CONTENT**



[camso.co](http://camso.co)

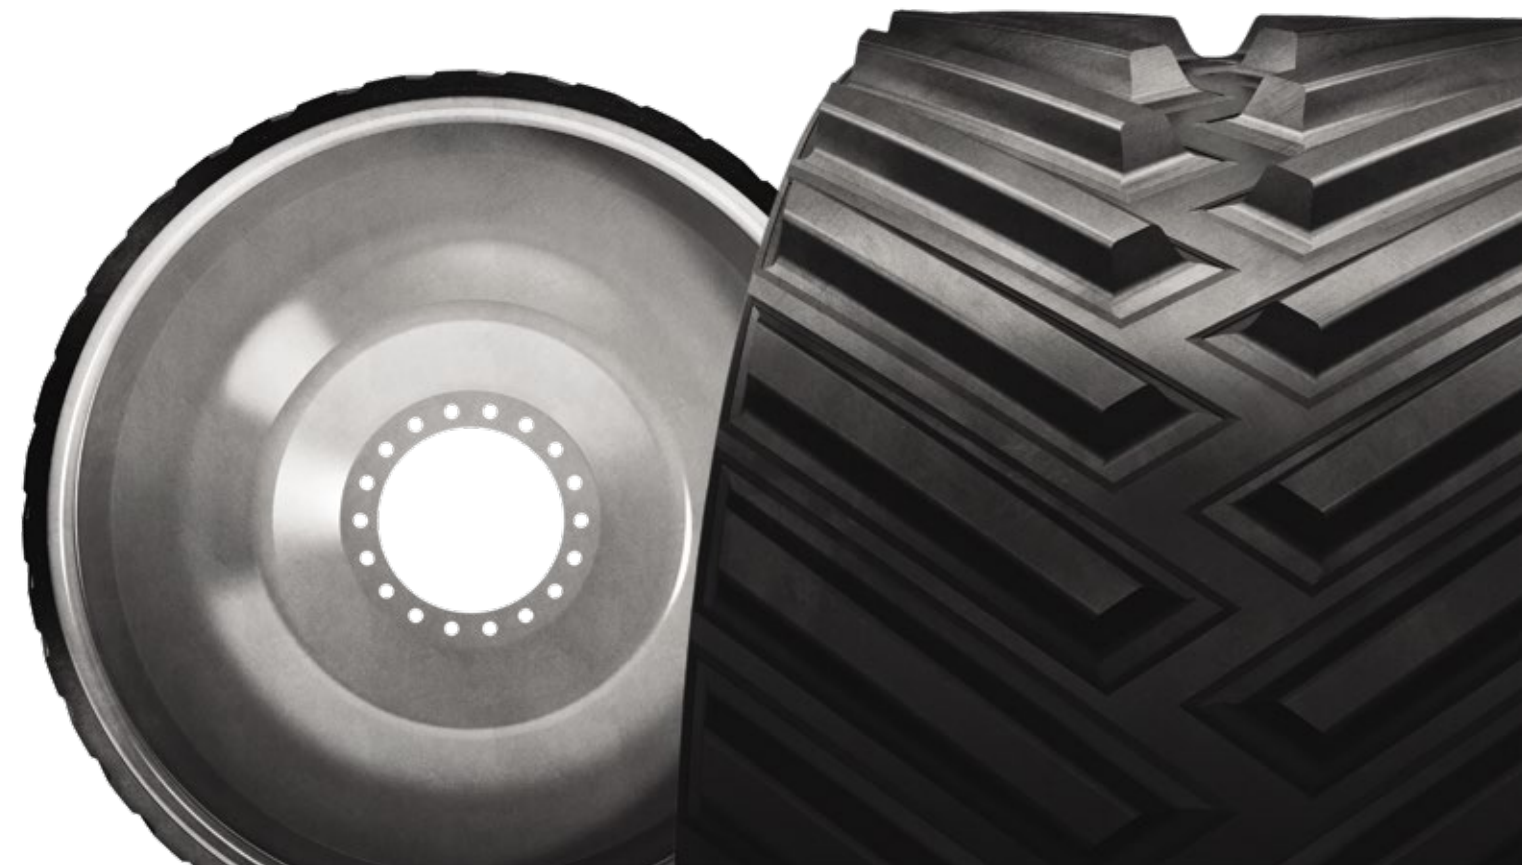



DRIVING FARMING FORWARD

# CAMSO AND CATERPILLAR

Every day, we ask ourselves: “Is there a better way to drive farming forward?” We believe there is – by providing mobility solutions to help you get the job done.

At Camso, we do it by developing and manufacturing the broadest range of tracks for all farming applications. Camso tracks increase mobility and flotation, and reduce soil compaction.

From field preparation to planting, harvesting and transport, Camso tracks help maximize your work while lowering your operating costs.

**OUR TRACKS ARE THE APPROVED CHOICE  
OF MANUFACTURERS, ENDORSED BY DEALERS  
AND RECOGNIZED BY FARMERS.**

COMPLETE LINEUP

# CATERPILLAR TRACTORS

Camsco offers the broadest range of tracks and replacement wheels for your Caterpillar tractor.

## CATERPILLAR 35/45/55 AND 65/75/85/95 SERIES



CAMSO AG  
5500



CAMSO AG  
3500



CAMSO AG  
2500

## CAMSO REPLACEMENT WHEELS



MIDROLLER



IDLER



DRIVER

# CATERPILLAR


## 35/45/55 AND 65/75/85/95 SERIES

DESIGNED TO CATERPILLAR'S  
SPECIFICATIONS, CAMSO TRACKS  
PROVIDE THE BEST BALANCE  
OF TREAD BAR LIFE AND CARCASS  
DURABILITY TO MAXIMIZE  
THE PERFORMANCE AND  
EFFICIENCY OF YOUR TRACTOR.



# SELECT THE RIGHT TRACK FOR YOUR APPLICATION AND FARMING CONDITIONS

## CATERPILLAR 35/45/55 AND 65/75/85/95 SERIES

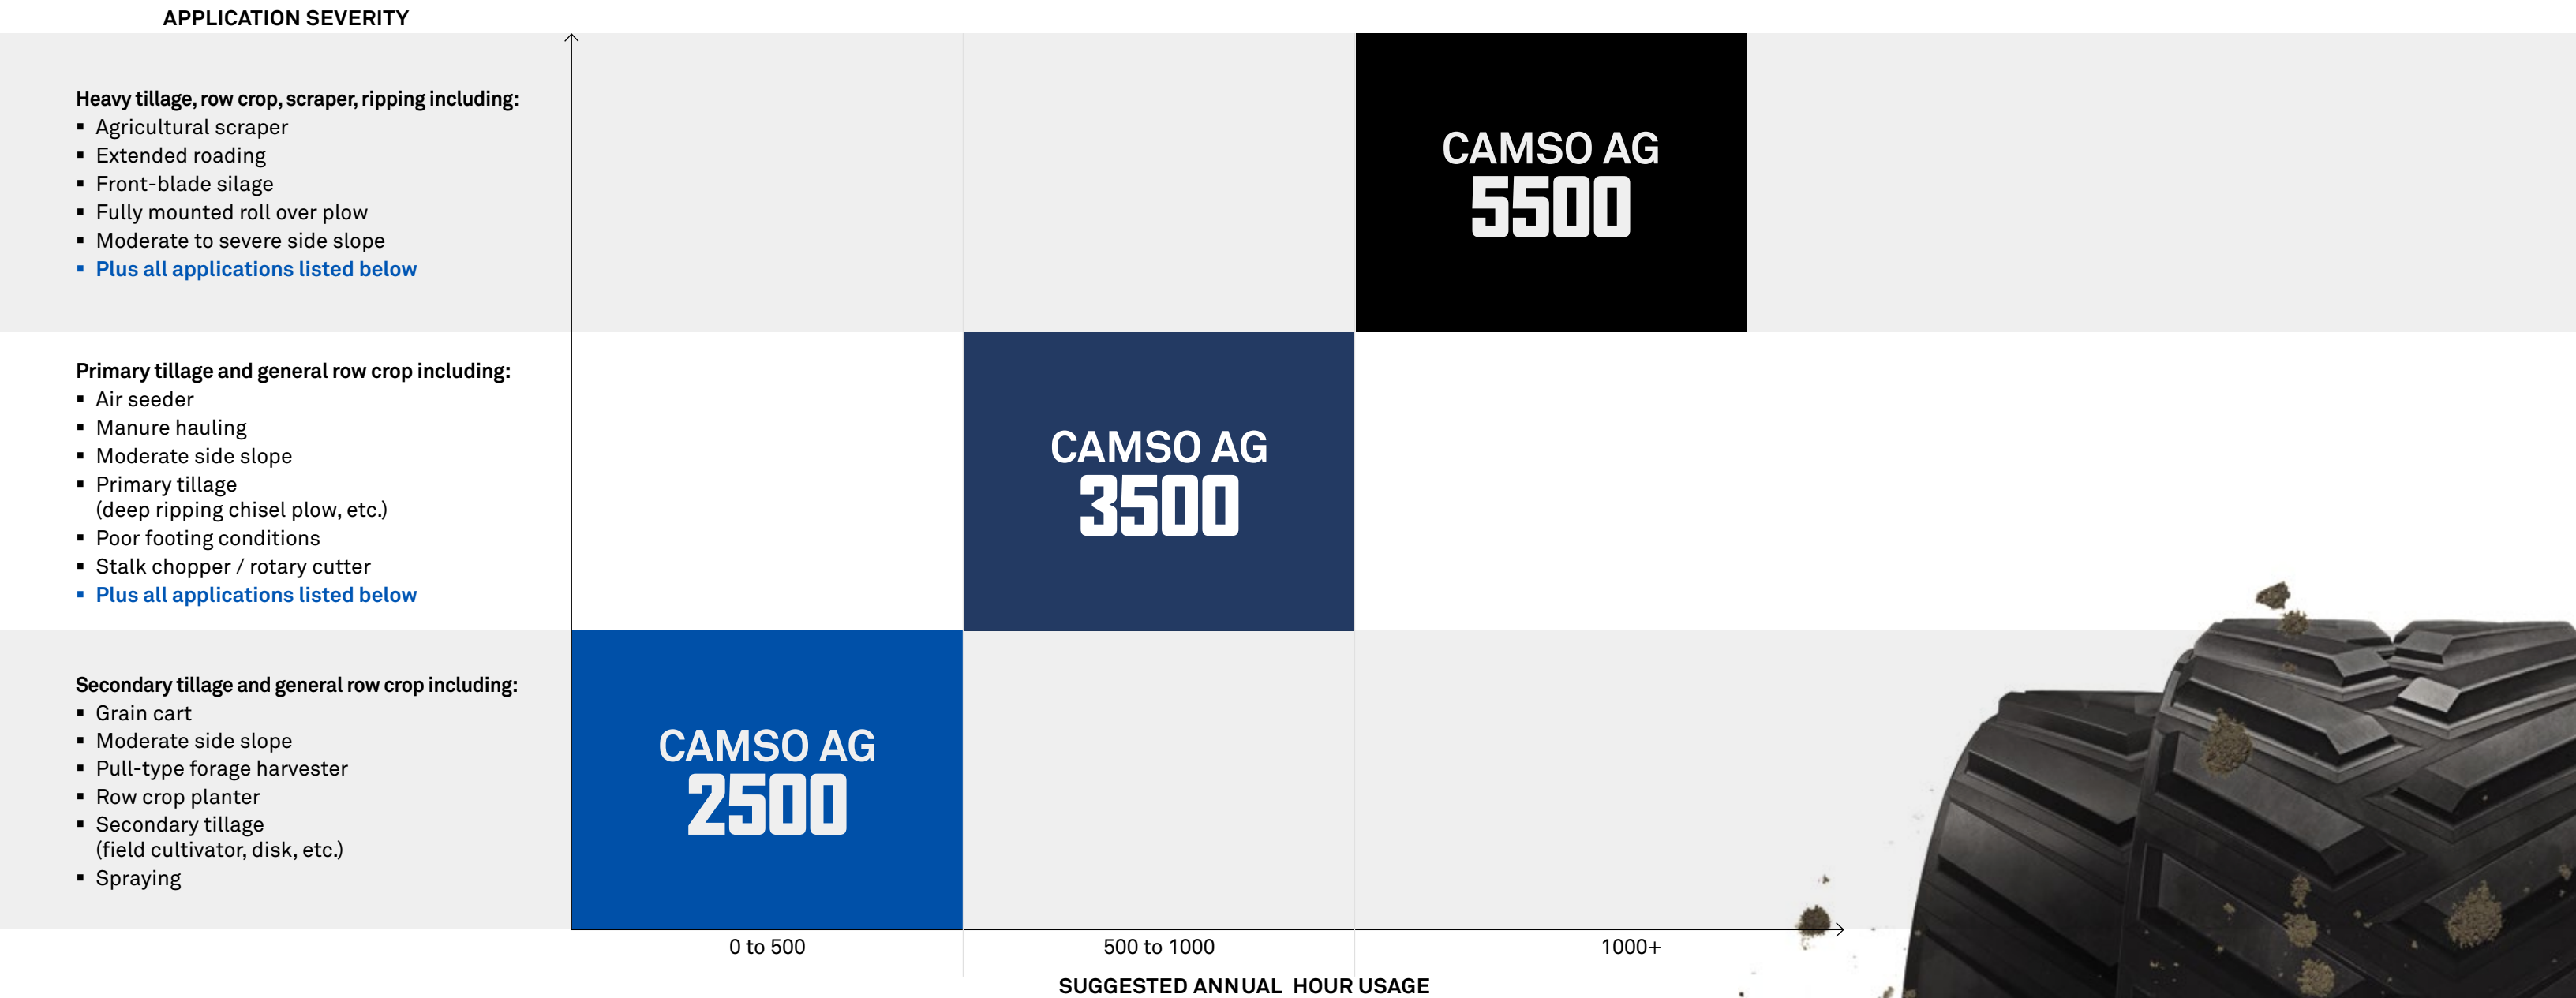

# FEATURES AND BENEFITS

## CATERPILLAR 35/45/55 AND 65/75/85/95 SERIES



### High-grade rubber compounds

Maximizes performance and durability



### Long lasting tread bar

Wear-resistant tread compound combined with a design geared towards your application



### Strengthened guide lugs

Enhanced guide lug geometry reduces risk of torn guide lugs



### Longest lasting carcass

Most durable, consistent and predictable performance due to Camso's unique manufacturing and curing process

















### Inner carcass impact protection

**3500 and 5500** – Inner steel reinforcement reduces the risk of carcass damage  
**5500** – Maximum rubber thickness reduces the risk of carcass damage and cable tear in very demanding applications

# CATERPILLAR

## 35/45/55 AND 65/75/85/95 SERIES



TRACK SERIES	APPLICATIONS	SUGGESTED ANNUAL HOUR USAGE	FEATURES	PERFORMANCE
<div>CAMSD AG 5500</div> <div>Go beyond industry standards</div>	Scraper, ripper, heavy tillage and row crop	1000+	<div><div><p>1</p><p>High-grade rubber compounds</p></div><div><p>2</p><p>Long lasting tread bar</p></div><div><p>3</p><p>Strengthened guide lugs</p></div><div><p>4</p><p>Longest lasting carcass</p></div><div><p>5</p><p>Inner carcass impact protection</p></div></div>	<div>TREAD LIFE</div> <div>CARCASS DURABILITY</div> <div>SIDE LOAD RESISTANCE</div>
<div>CAMSD AG 3500</div> <div>An industry standard track made to last</div>	General tillage and row crop	500 to 1000	<div><div><p>1</p><p>High-grade rubber compounds</p></div><div><p>2</p><p>Long lasting tread bar</p></div><div><p>3</p><p>Strengthened guide lugs</p></div><div><p>4</p><p>Longest lasting carcass</p></div><div><p>5</p><p>Inner carcass impact protection</p></div></div>	<div>TREAD LIFE</div> <div>CARCASS DURABILITY</div> <div>SIDE LOAD RESISTANCE</div>
<div>CAMSD AG 2500</div> <div>Competitive performance, for less</div>	Secondary tillage and general row crop	100 to 500	<div><div><p>1</p><p>High-grade rubber compounds</p></div><div><p>2</p><p>Long lasting tread bar</p></div><div><p>3</p><p>Strengthened guide lugs</p></div><div><p>4</p><p>Longest lasting carcass</p></div></div>	<div>TREAD LIFE</div> <div>CARCASS DURABILITY</div> <div>SIDE LOAD RESISTANCE</div>

REMANUFACTURING PROGRAM

# DON'T FORGET: YOUR CORE HAS A VALUE

Your worn tracks and wheels can now be remanufactured, helping you to save up to 40% on MSRP.

Our Certified Remanufacturing Program provides you with an economical, effective and durable solution for general agriculture applications that will extend the use of your tracks and wheels.

Contact your Camso authorized dealer or visit [camso.co](https://camso.co) to learn more about our program.



**GIVE MULTIPLE LIVES  
TO A PRODUCT  
YOU'VE ALWAYS TRUSTED.**

CAMSO'S CERTIFIED REMANUFACTURING PROGRAM  
IS AVAILABLE FOR FRICTION DRIVE TRACKS

DRIVEN BY QUALITY

# PERFORMANCE AND DURABILITY FROM THE INSIDE OUT

Camso longest lasting carcass

No material displacement during the manufacturing and curing process means:

- Rubber compounds located exactly where you need them
- Uniform tension distribution, minimizing downtime due to carcass tear
- A product with increased durability and performance



DURABLE, CONSISTENT AND PREDICTABLE PERFORMANCE

TECHNICAL SPECIFICATIONS

## CATERPILLAR 35/45/55 AND 65/75/85/95 SERIES

CAMSO Track series	CATERPILLAR Tractor model	Track width (in.)	Part number	Tread				Guide lugs		Carcass		
				Qty	Height (in.)	Tip width (in.)	Pitch (in.)	Qty	Length (in.)	Bias ply	Main cable size (mm)	Thickness (mm)
5500	35/45/55	16	650-1603	48	2.6	2.3	6.8	48	4.8	4	5.4	39
		16	650-1602	48	2.6	2.3	6.8	48	4.8	4	5.4	39
		18	650-1802	96	2.6	2.3	6.8	48	4.8	4	5.4	39
		25	650-2502	96	2.6	2.3	6.8	48	4.8	4	5.4	41
		18	650-1843 High roading	48LH	2.6	2.3	6.8	48	4.8	4	5.4	39
		18	650-1842 High roading	48RH	2.6	2.3	6.8	48	4.8	4	5.4	39
		18	650-1841 High traction	72	2.6	1.5	9	48	4.8	4	5.4	39
	65/75 85/95	27,5	652-2702	96	2.6	1.5	7.2	48	5	3	5.4	41
		30	652-3055	96	2.6	1.5	7.2	48	5	4	5.4	41
		30	652-3004	96	2.6	1.5	7.2	48	5	3	5.4	41
		27,5	652-2713	96	2.6	1.5	7.2	48	5	4	5.4	41
		25	652-2506	96	2.6	1.5	7.2	48	5	4	5.4	41
		27,5	652-2714 High roading	96	2.6	1.9	7.2	48	5	4	5.4	41
		30	652-3052 High roading	96	2.6	1.9	7.2	48	5	4	5.4	41
		30	652-3049 High traction	74	2.6	1.5	9.3	48	5	4	5.4	41
3500	35/45/55	16	630-1601	96	2.6	1.5	6.8	36	5.5	3	5.4	31
		18	630-1801	96	2.6	1.5	6.8	36	5.5	3	5.4	31
		25	630-2501	72	2.6	1.5	9	48	5.5	4	4.3	32
		30	630-3009	72	2.6	1.5	9	48	5.5	4	4.3	35
	65/75 85/95	25	632-2529	74	2.6	1.5	9.3	36	6.2	3	4.3	36
		27,5	632-2711	74	2.6	1.5	9.3	36	6.2	3	4.3	36
		30	632-3048	74	2.6	1.5	9.3	36	6.2	3	4.3	36
		27,5	632-2715 Low Ground Disturbance	96	1.6	2.8	7.2	48	5	3	4.3	36
		30	632-3057 Low Ground Disturbance	96	1.6	2.8	7.2	48	5	3	4.3	36
2500	35/45/55	16	A16AH03302	96	2.1	2.0	6.8	36	5.5	3	5.4	29
		18	A18AH03303	96	2.1	2.0	6.8	36	5.5	3	5.4	29
		25	A25AH03304	72	2.1	2.0	9	36	5.5	3	4.3	29
		30	A30AH03305	72	2.1	2.0	9	36	5.5	4	4.3	32
	65/75 85/95	25	A25AB03311	74	2.3	1.6	9.3	36	5	3	4.3	34
		30	A30AB03312	74	2.3	1.6	9.3	36	5	3	4.3	34

Warranty: Camso is the industry standard for warranty coverage on agricultural tracks. Tracks are warrantied against defects in materials and workmanship, and pro-rated based on both time and usage, so customers receive fair value on warranty replacement tracks. Some conditions apply. Refer to the warranty certificate for details. For more info, visit [camso.co/agriculture](https://camso.co/agriculture)

# REPLACEMENT DRIVER, IDLER AND MIDROLLER WHEELS

Engineered based on manufacturer’s specifications

12-month material and workmanship defect warranty

## WHEEL TECHNICAL SPECIFICATIONS

PRODUCT FAMILY	CAMSO PART NUMBER	OEM PART NUMBER	COATING TYPE	MODEL/TRACK WIDTH COMPATIBILITY
35/45/55				
Midroller	4W-0232P	1R-1365	Rubber	All
Idler	1R-1204P	1R-1204	Rubber	All
Driver (RH)	1R-1230P	1R-1230	Rubber	All
Driver (LH)	1R-1231P	1R-1231	Rubber	All
65/75/85/95				
Midroller	4W-0240P	9U3384	Rubber	All
Idler	1R-1346P	1R-1346	Rubber	Solid Idler
Driver (RH)	1R-1184P	1R-1184	Rubber	Inboard Brake
Driver (LH)	1R-1185P	1R-1185	Rubber	Inboard Brake
Driver (RH)	1R-1347P	1R-1347	Rubber	Caliper Brake
Driver (LH)	1R-1348P	1R-1348	Rubber	Caliper Brake

